MAKE LIFE EASY : READ AND FOLLOW ALL INSTRUCTIONS **CUSTOMER SERVICE :** 1-800 - 474 - 6615

1

Select holes that correspond to width of bicycle tire.

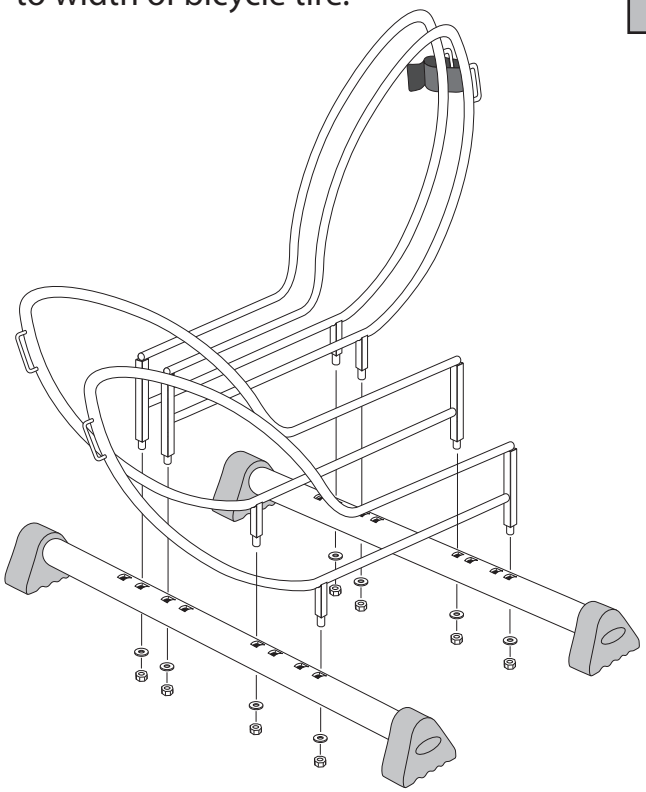

2

Use 10mm (or open ended adjustable) wrench to tighten nuts.

NOTE: Nuts may be stiff to tighten.

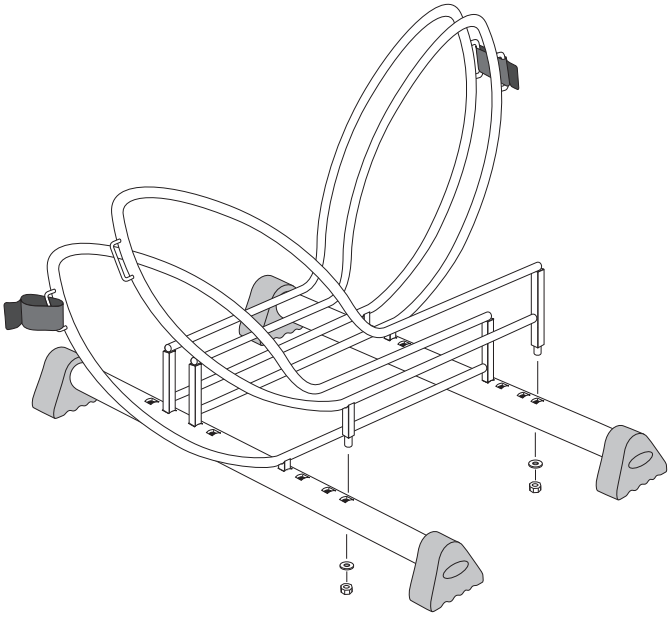

3

Secure arms at correct width using velcro strap.

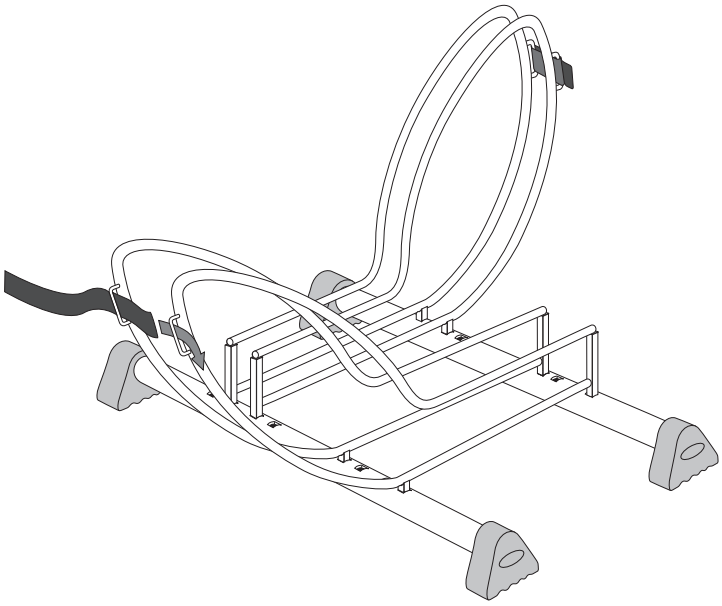

4

Once fully assembled, minor twisting by hand may be required so rack is level with floor.

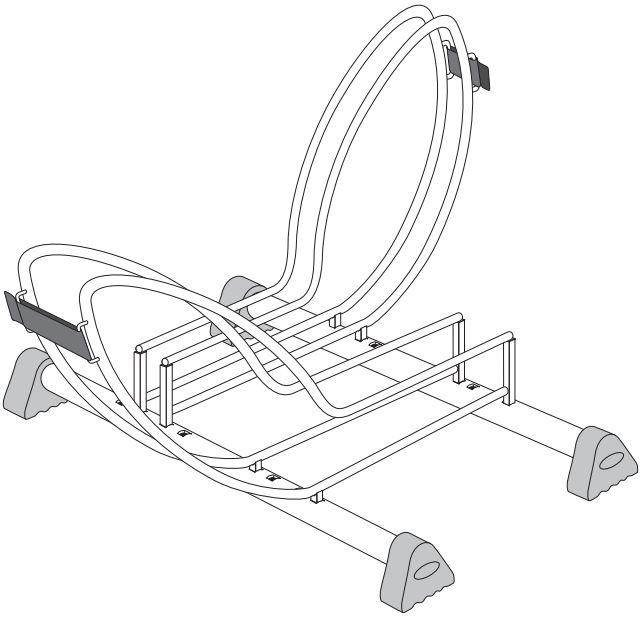

DELTA DESIGN theartofstorage™

Delta Design Company
125 Washington St. Unit #7
Foxborough, MA 02035 USA
Phone: 800 - 474 - 6615

SEURAT RS8000
ASSEMBLY DIAGRAM

© Copyright 2008